


J Series Pendant Stations - Polypropylene Enclosures

One-Speed through Five-Speed Control plus Accessories With Standard Cord Grip

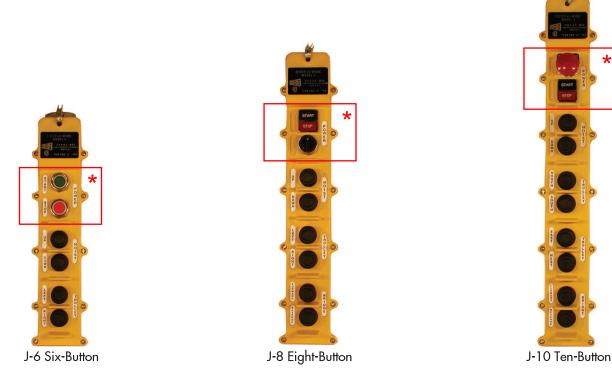

*Drilling of Accessory Area may be required

Each enclosure includes a standard package of legend plates, cord grip, strain relief thimble and neoprene boots. The top accessory area on these enclosures will accept one two-button insert or two single buttons.

- Durable and lightweight Polypropylene Construction
- NEMA 1, 3, and 12
- Bright yellow for visibility and safety
- High resistance to solvents and impact
- CSA Approved
- Easy to read legend plates

| Dimensions and Weights | | | | | | | | | |
|--------------------------|------------------|-------|--------|--------|----------------|-----|---|---------------|--|
| Enclosure | | | | | Accommodates | | Cord Grip and Bushings for J Series Pendants | | |
| Catalog | Dimension-Inches | | | Weight | Cable Diameter | | Catalog No. Cord Grip Cable Diameter (Inches) | | |
| Number | Width | Depth | Length | Lbs. | (Inches*) | | RPC-CG4 | .625750 | |
| J-6 | 3-3/4 | 3-3/4 | 16 | 2-1/2 | .688 - 1.250 | 1 | RPC-CG5 | .750875 | |
| J-8 | 3-3/4 | 3-3/4 | 20 | 3 | .688 - 1.250 | | RPC-CG6 | .875 - 1.000 | |
| J-10 | 3-3/4 | 3-3/4 | 24 | 3-1/2 | .688 - 1.250 | | RPC-CG7 | 1.000 - 1.125 | |
| * Specify Cable Diameter | | | | | |] [| RPC-CG8 | 1.125 - 1.250 | |

Pictures are for illustration purposes and may not represent actual product. Duct-O-Wire[®] recommends installation of an Emergency Stop on all Pendants.

